Tilt
LCD/PLASMA wall Mount
assembly instructions

⚠ CAUTION - This Plasma/LCD mount is intended for use only with the maximum weight indicated. In the event of products being heavier than the maximum weight indicated this may result in product instability that could cause possible injury.

Model	Elegant Audio Video Self	Elegant Cable Cover
41	80	83

For further information, visit us at:
www.barkanmounts.com

Max PLASMA/LCD
60"/152cm

Max	US	EU
	143lbs	65kg

Barkan Mounting systems *A better point of view™*

110041.5 15.12.08

1:10

A x2

B x2

C

D x1

1:2

E x1

F x6

G x6

H 3/4" 1/4" x4

I M5 x2

J 1/4" x4

K M6 x2

M The provided **Screen** bolts may change in size according to changing screen requirements x1

Please make sure that package contains all parts

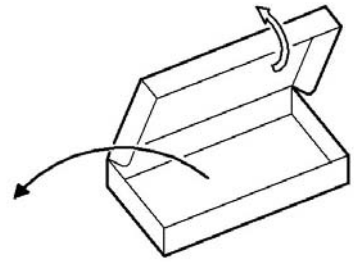

1 Hardware assembly

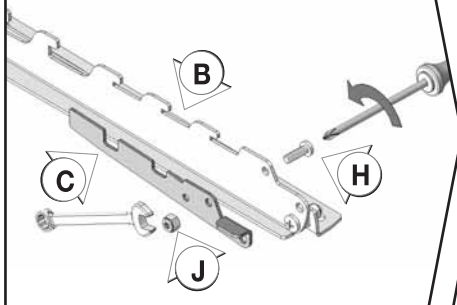

Note: Repeat assembly twice

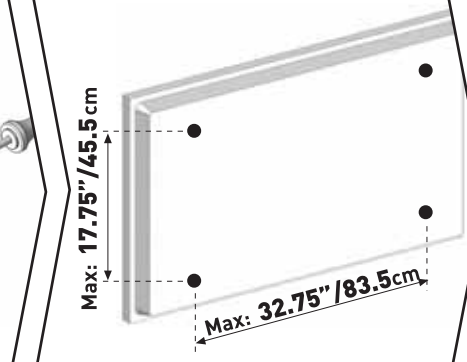

Hardware assembly to screen

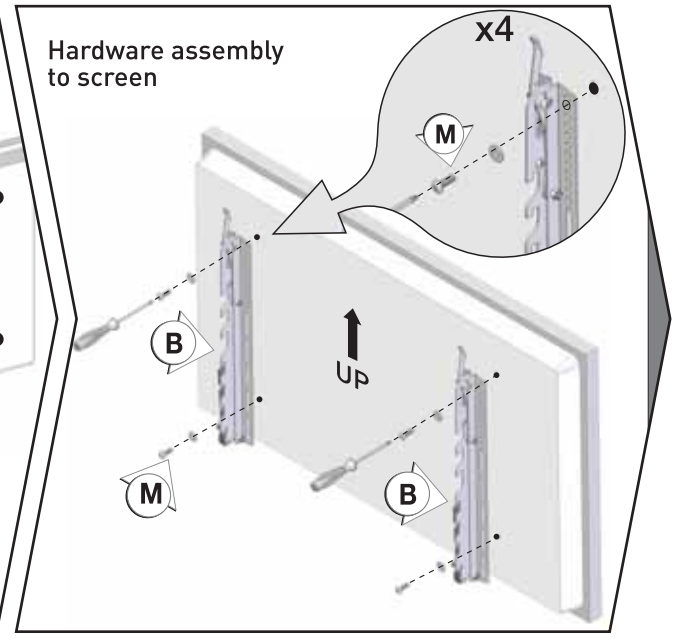

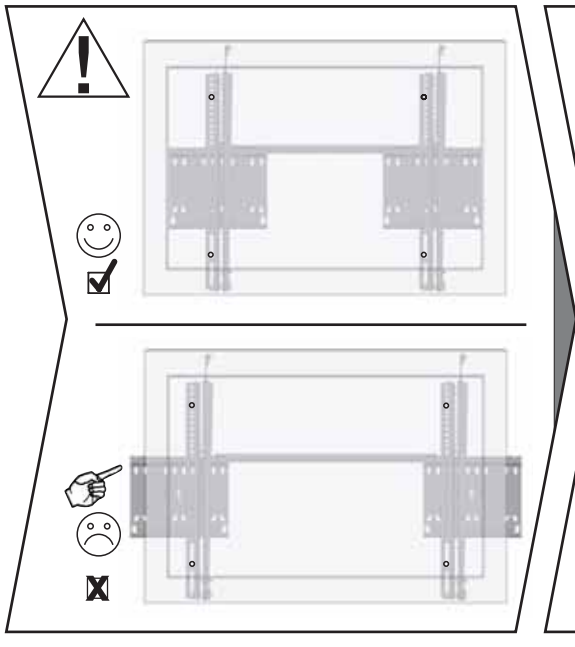

Width adjustment

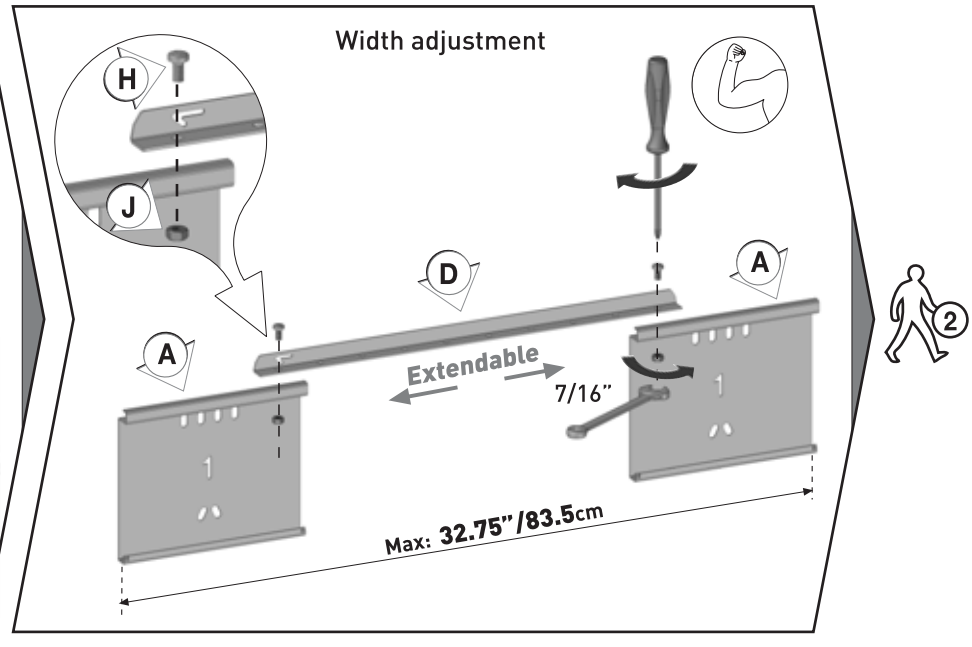

2

Concrete, Solid bricks or Hollow concrete block walls

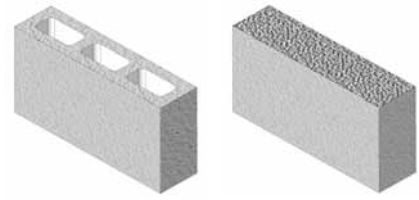



Wood stud wall

2A

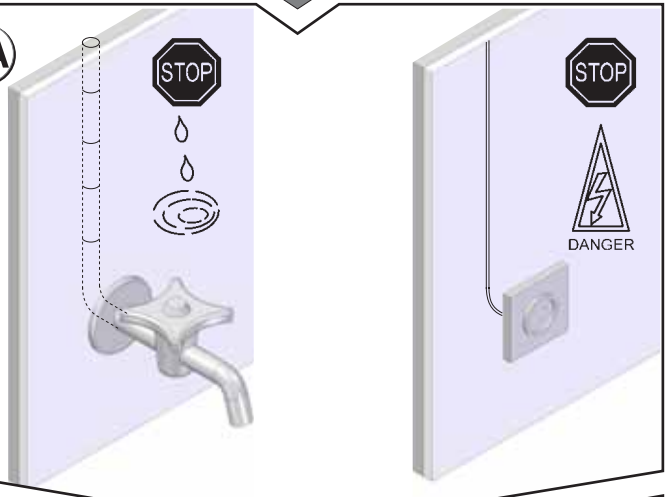

2B Level & mark

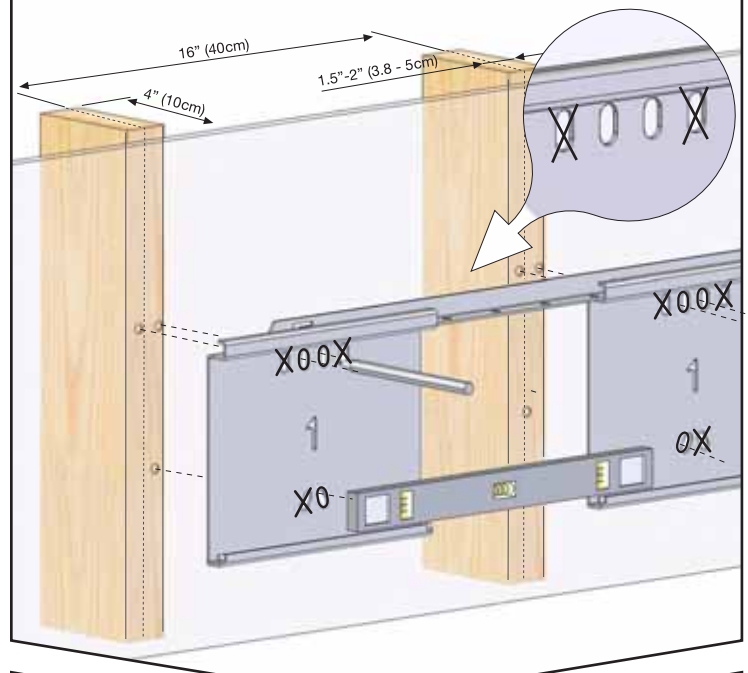

Level & mark

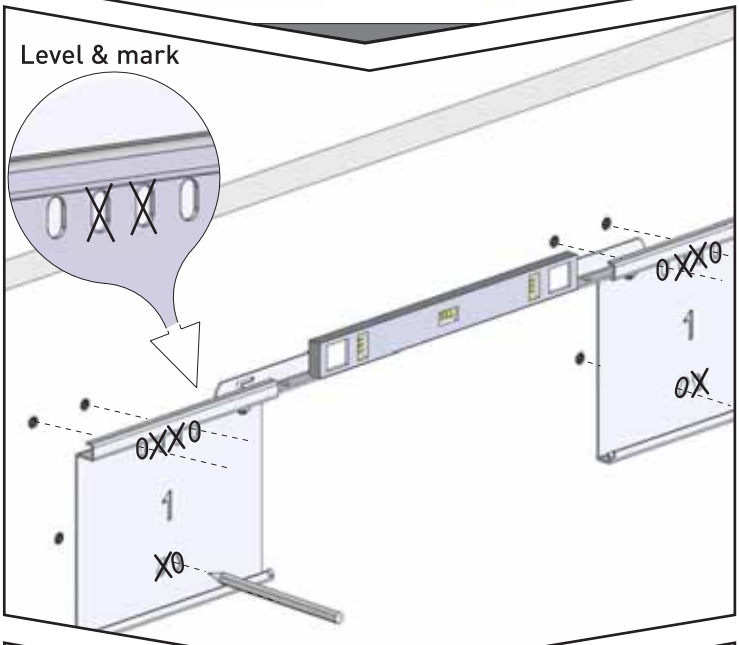

Drill 5/32" (4mm)

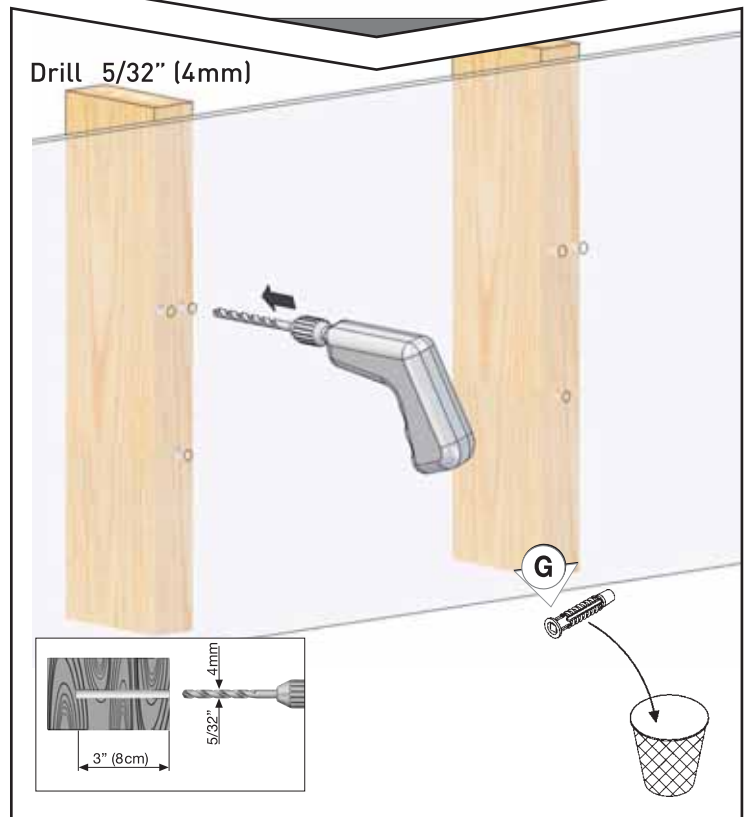

First drill 1/4" (6mm)

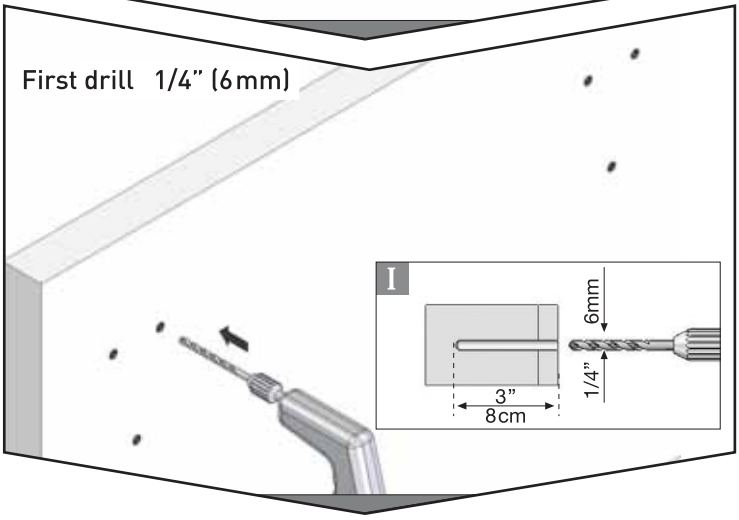

3A

3B

3A Second drill 3/8" (10mm)

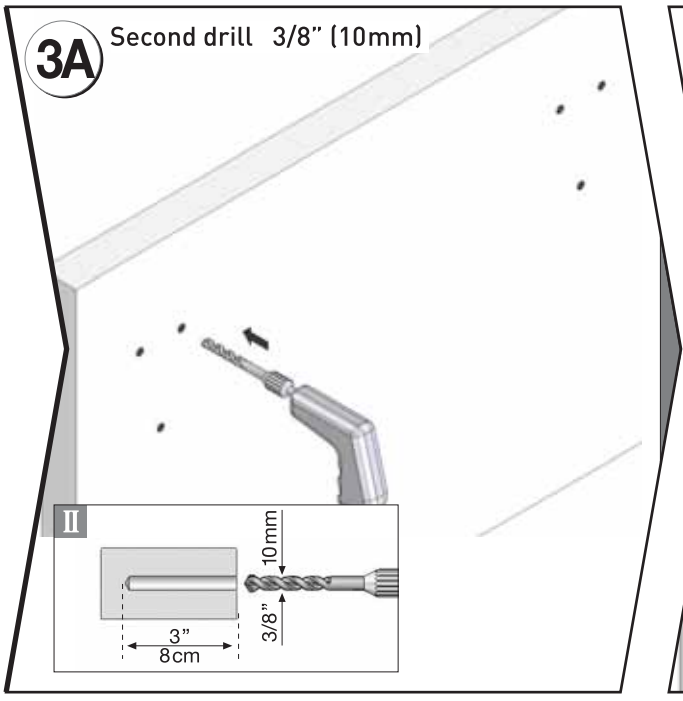

Insert anchors

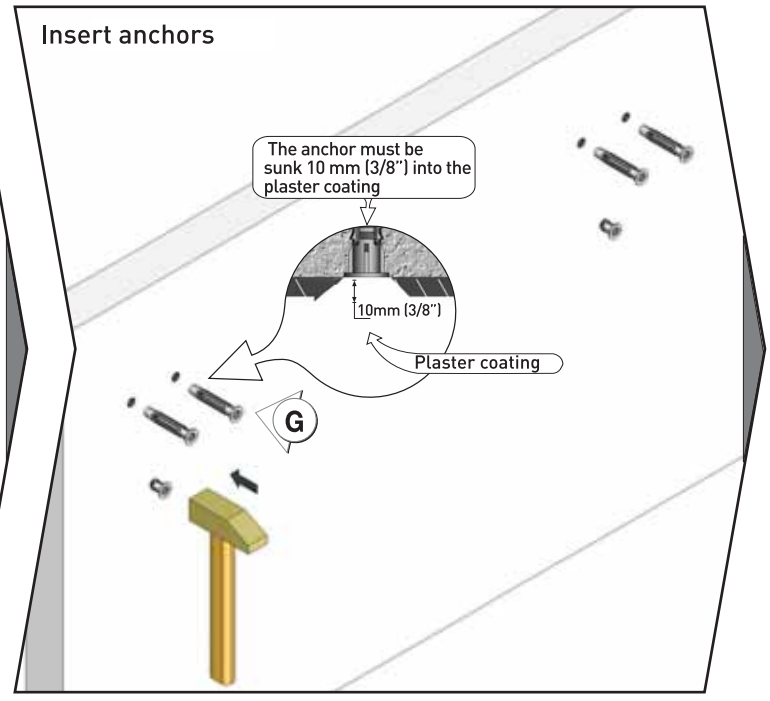

Assembly to Concrete, Solid bricks or Hollow concrete block walls

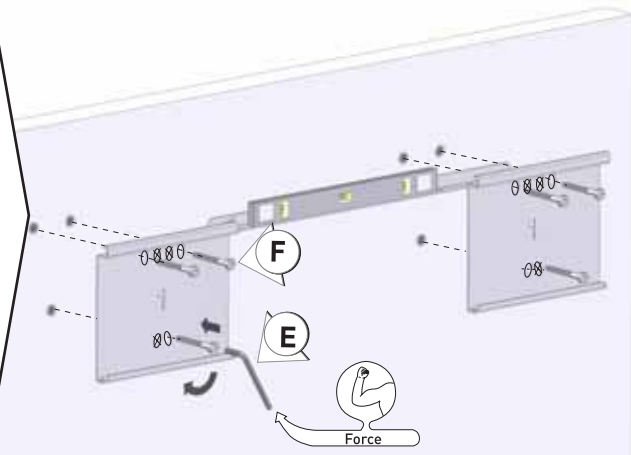

Concrete or heavy solid brick wall

concrete hollow blocks

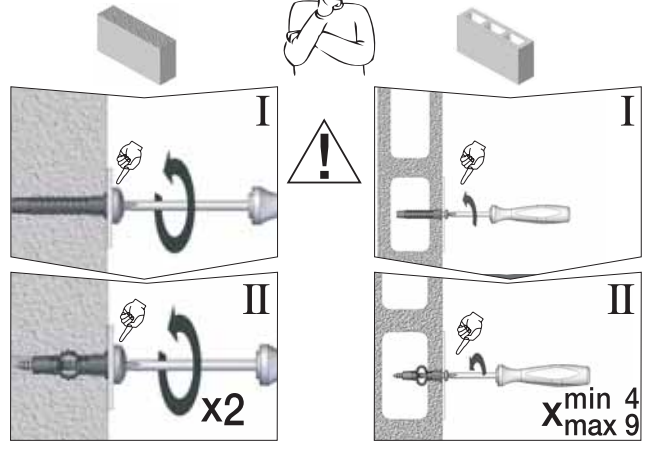

3B Assembly to Wood stud wall

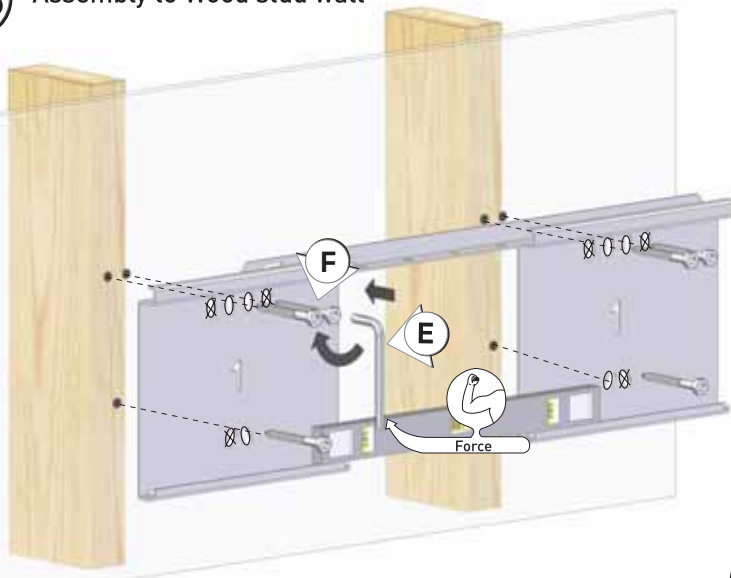

4 TEST

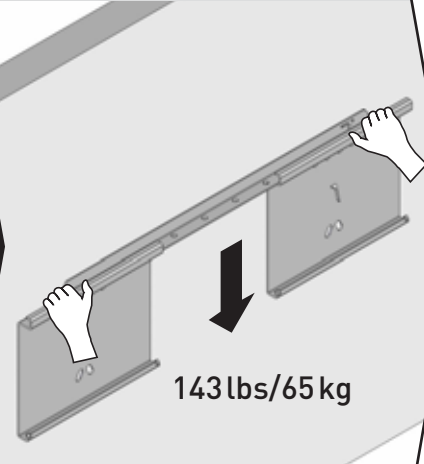

5 Mount screen to the wall



HEIGHT ADJUSTMENT
Choice of 3 height positions for enhanced viewing quality

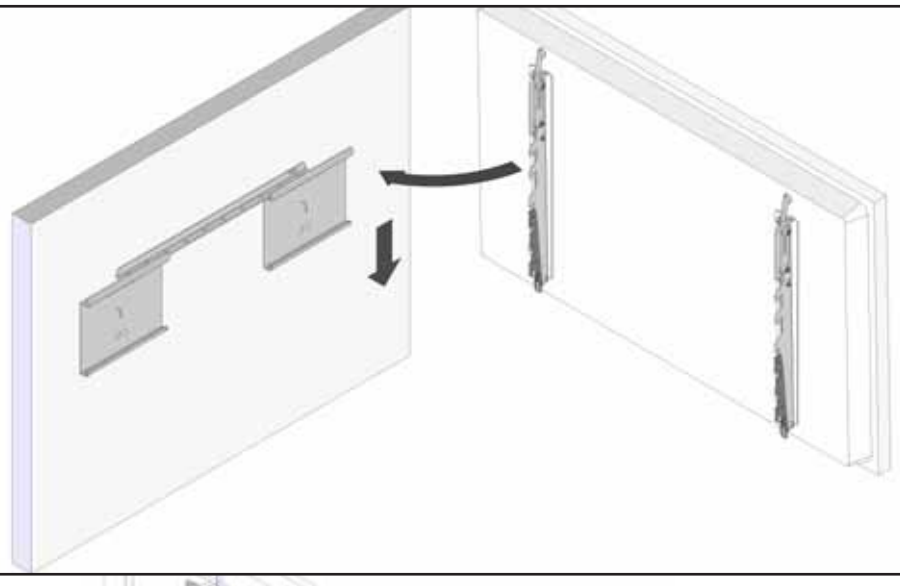

Safety lock hardware assembly

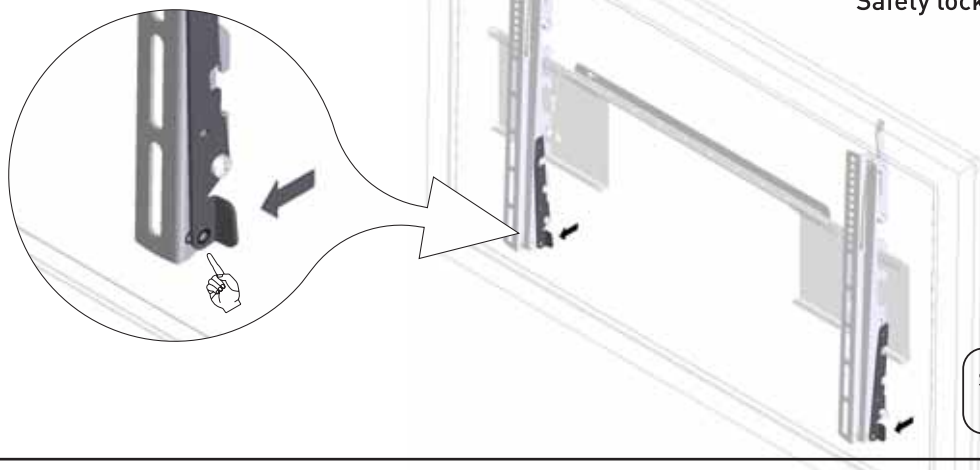

FALL & THEFT PROOF
Secure locking system, preventing theft and accidents

Padlock/safety hardware assembly

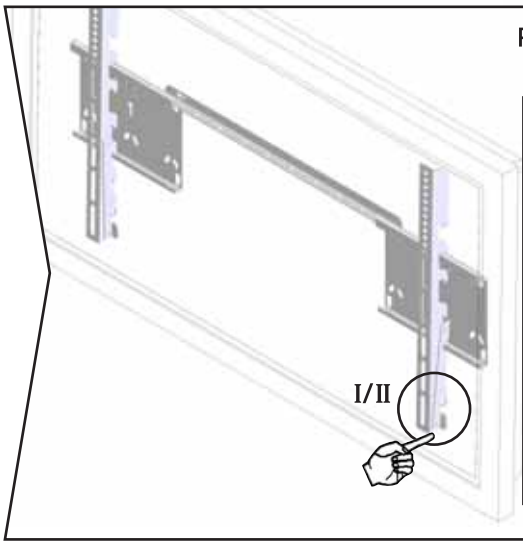

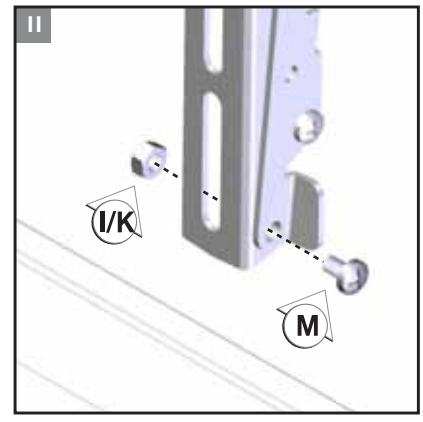

6



Left & right adjustment
Easy screen positioning during installation , for enhanced viewing quality

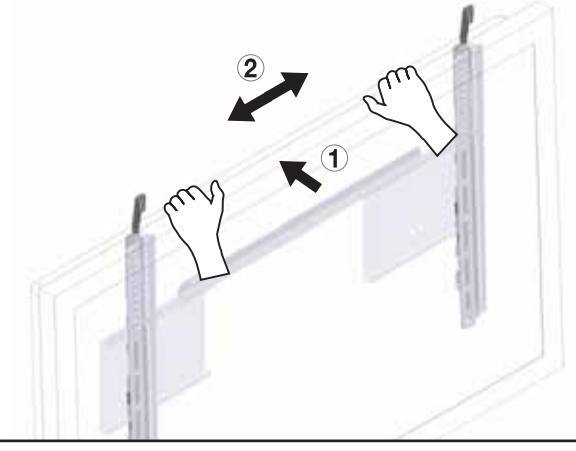

7 Tilt adjustment by hand

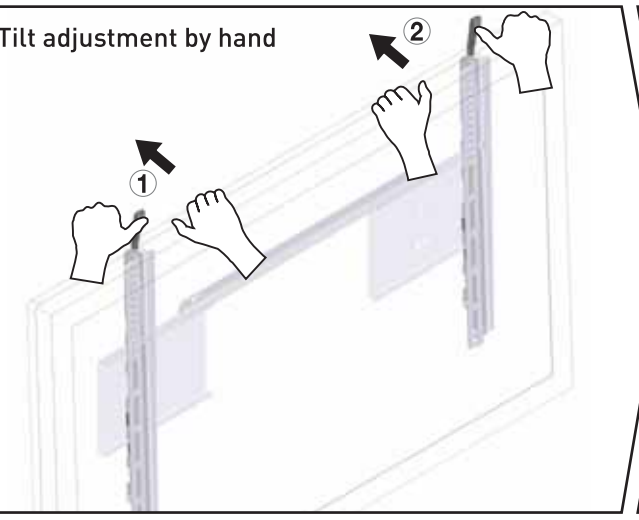

TILT ADJUSTMENT
Choice of 4 tilt positions for enhanced viewing quality

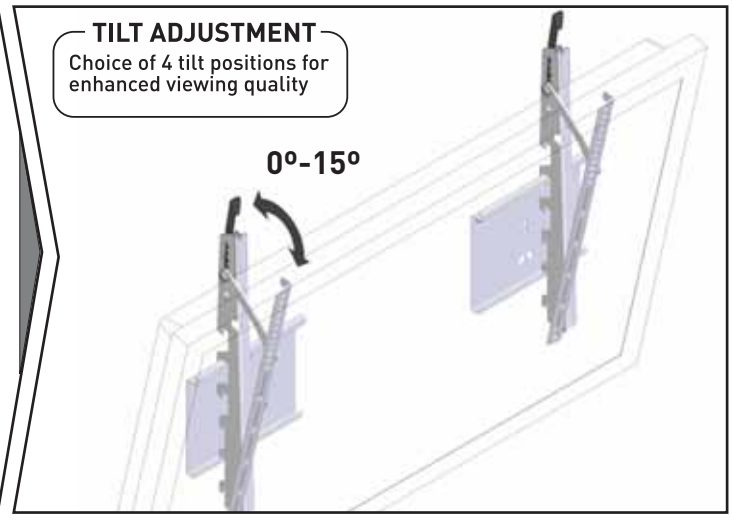

8 DIS ↔ CONNECT Padlock/ safety hardware removing

⚠ Caution!
Be careful when disconnecting to prevent the screen from falling

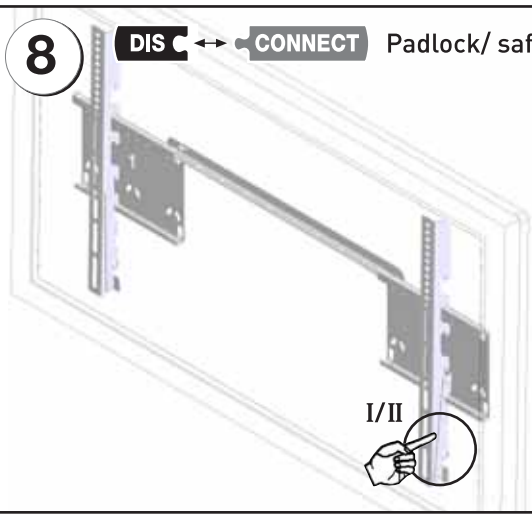

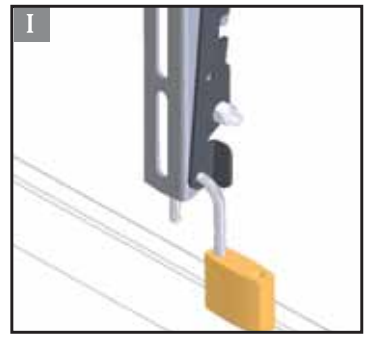

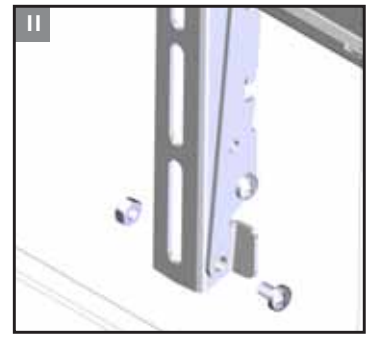

Pull Safety lock hardware by hand

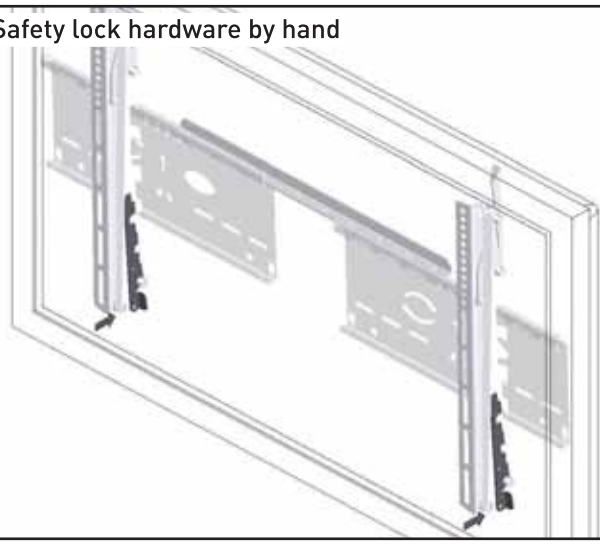

Disconnect screen from wall mount

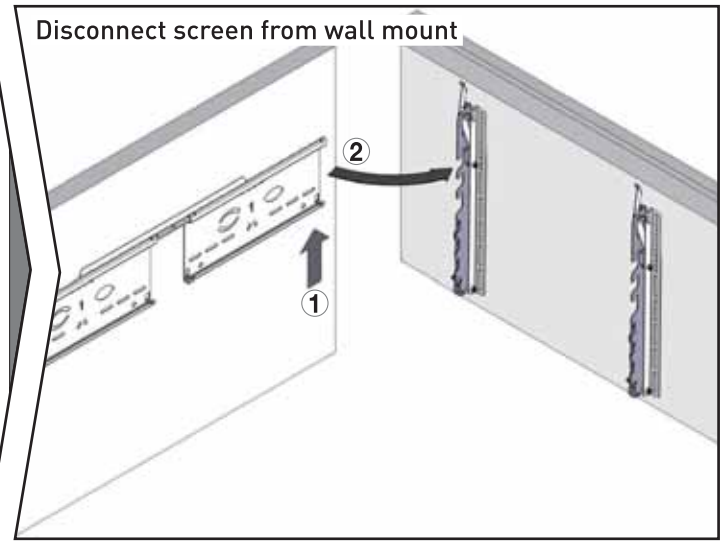

Dear customer, we welcome your comments and suggestions to improve our products, ease of assembly and instructions. Please contact us through our website: **www.barkanmounts.com**